
## FORD TRUCKS 4142M EURO6



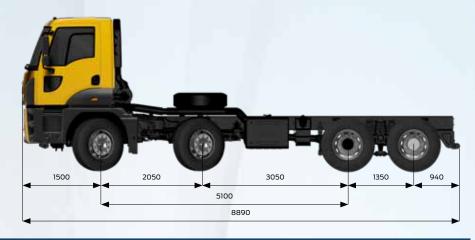

57 L (77 L with Intarder)

Basic Features	
Vehicle Type	Mixer
Axle	8x4
Emission	Euro 6
Cabin Type	Day Cab
Wheelbase (mm)	5100

Engine	
Type	Ecotorq 12,7 liters
Displacement (cc)	12740
Bore x Stroke	130 mm x 160 mm
Power	420 PS (308,9 kW ) / 1800 rpm
Torque	2150 Nm / 1000-1300 rpm
Compression Ratio	17 +/- 0,5 : 1
Oil Filling Volume	50 L

Hallsillission	
Clutch	430 mm Single Disc
Manuel Transmission / Ratios (1. gear - 16. gear)	ZF 16S 2230 (13,805-0,836)

Automated Transmission / Ratios (1. gear - 10. gear)

ZF 103 2230 (13,600-0,030)

ZF 12 TX 2210 (16,688-1)

Steering

Coolant Volume

Power assisted single circuit

Cilassis	
Chassis Thickness	10 mm with Local Reinforcement
Chassis Strength	500 MPa
Suspension (Front / Rear)	90 mm Parabolic Leaf Springs / 100 mm Parabolic Tandem Suspension
Axle	Hub Reduction
Axle Ratio (Manual / Automatic)	4,08 / 3,57
Tyres	315/80 R 22,5
Wheel Rim	22.5 x 9 Steel

Braking System
Brakes (Ø mm x mm Length) 430 x 45 - Disc Brakes

Braking System Dual Brake Circuit - Air Processing Unit with Integrated Oil Seperator and Heater

Engine Brake Power max. 320 kW (Engine Level)

Intarder Power max. 600 kW / continuous 160 kW

Electrical System

 Battery
 24V, 2 x 12V 150 Ah

 Alternator / Starter Motor
 130 A / 6, 5 kW

 Tanks
 315 L Steel

 SCR Tank
 55 L



Dimensions (mm)					
Front Overhang			1500		
Wheelbase			5100		
Overall Length			8890		
Distance Between 1st and 2nd Wheel Centers			2050		
Distance Between 2 <sup>nd</sup> and 3 <sup>th</sup> Wheel Centers			3050		
Distance Between 3th and 4th Wheel Centers			1350		
Overall Cab Length			1820		
Overall Vehicle Height			3200		
Overall Vehicle Width (Excluding Mirrors)			2540		
Chassis Width			770		
Rear Overhang			940		
Useful Chassis Length			6494		
Chassis Height - Front			1185		
Chassis Height - Rear			1186		
Ground Clearance - Front			380		
Ground Clearance - Rear			296		
Turning Radius			10640		
Weights (kg)	1. Axle	2. Axle	3. Axle	4. Axle	Total
Tochnically Pormissible Weights	9000	9000	12400	12400	41000

Weights (kg)	1. Axle	2. Axle	3. Axle	4. Axle	Total
Technically Permissible Weights	8000	8000	13400	13400	41900
Kerb Weight	3445	3476	2093	2001	11015
Payload	4555	4524	11307	11399	30885
GVM (Legal)	8000	8000	9500	9500	32000

## STANDARD EQUIPMENT

- Manuel Air conditioner
- AM/FM/Aux In/USB/Bluetooth (Radio with Bluetooth)
- 4 Points Independent Cab Suspension for Day Cab
- Engine Driven PTO & Interior Control Unit
- Cruise Control
- Engine Brake
- Disc Brake
- Electrically Operated Windows
- Electrically Operated and Heated Side Mirrors
- Electrically Operated Headlamp Leveling
- Rake and Reach Adjustable Steering Column
- Heated and Air Suspended Driver Seat
- Lumbar Support
- Anti-lock Brake System (ABS)
- Continuous Wear Sensor
- Immobilizer
- Single Key with Remote Control and Central Locking
- Home Safe
- Approach Lights
- Differential Lock
- Digital Tachograph
- Rear Window \*\*
- Front Towing Hooks (Double Hook)
- Short Bumper

## **OPTIONAL EQUIPMENT**

- Transmission Direct (Single Gear) PTO with Flange (includes Power Take off Control Unit)
- Transmission Direct (Single Gear) PTO without Flange (includes Power Take off Control Unit)
- Transmission Offset (Double Gear) PTO without Flange (includes Power Take off Control Unit)
- Transmission Direct (Double Gear) PTO with Flange (includes Power Take off Control Unit)
- Automated Transmission (with Normal Mode, Off-Road Mode, Rocking Mode)
- Intarder
- ADR Pack
- Wet Type Cab Heater
- Auxiliary Cabin Heater (Wet Type)
- Cold Pack with Dry & Wet Type Cab Heater and 225 Ah Battery\*
- Switchable Air Compressor for Improved Fuel Economy
- Transmission Driven PTO Options & Interior Control Unit
- Rubber Suspension (28T)\*\*
- Front and Rear Vehicle Antiroll Bars
- Dual Passenger Seat\*
- Lateral Protection
- Manually Operated Sunroof
- Automatic Traction Control (ATC)
- Less Spare Tire

<sup>\*</sup> Not available with Low Roof Sleeper cab version.

<sup>\*\* 241</sup> kg lighter compared to standard suspension vehicle.