
FORD TRUCKS 4142XD EURO6



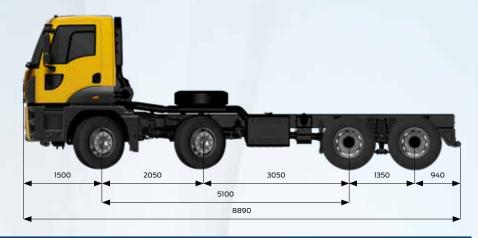

Basic Features	
Vehicle Type	Tipper
Axle	8x4
Emission	Euro 6
Cabin Type	Day Cab
Wheelbase (mm)	5100

Engine	
Туре	Ecotorq 12,7 litre
Displacement (cc)	12740
Diameter x Stroke	130 mm x 160 mm
Power	420 PS (308,9 kW) / 1800 rpm
Torque	2150 Nm / 1000-1300 rpm
Compression Ratio	17 +/- 0,5 : 1
Oil Filling Volume	50 L
Coolant Volume	57 L (with Intarder 77 L)

Transmission	
Clutch	2 x 400 mm Twin Clutch
Manuel Transmission / Ratios (1. gear - 16. gear)	ZF 16S 2230 (13,805-0,836)
Automated Transmission / Ratios (1. gear - 12. gear)	ZF 12 TX 2210 (16,688 - 1)

Automated Transmission / Ratios (1. gear - 12. gear)

Steering

Power assisted single circuit

Chassis						
Chassis Thickness	10 mm with Reinforcement					
Chassis Strength	500 MPa					
Suspension (Front / Rear)	Parabolic Leaf Springs / Parabolic Tandem Suspension					
Axle	Hub Reduction					
Axle Ratio (Manual / Automatic)	4,87 / 4,08					
Tyres	13 R22,5					
Wheel Rim	22,5 x 9 Steel					

Tyres	13 R22,5
Wheel Rim	22,5 x 9 Steel
Braking System	
Brakes (Ø mm x mm Length)	410 X 200, Z-Cam Drum Brake System
Braking System	Dual Brake Circuit – Air Processing Unit with Integrated Oil Seperator and Heater
Engine Brake Power	max. 320 kW (Engine Level)

Intarder Power	max. 600kW / continuous 160kW		
Electrical System			
Battery	24V, 2 x 12V 150 Ah		
Alternator / Starter Motor	130 A / 6,5 kW		
Tanks			
Fuel Tank	315 L Steel		
SCR Tank	55 L		



Dimensions (mm)					
Front Overhang			1500		
Wheelbase			5100		
Overall Length			8890		
Overall Vehicle Height			3254		
Overall Cab Length			1820		
Rear Overhang			940		
Useful Chassis Length			6494		
Overall Vehicle Width (Excl. Mirrors)			2540		
Ground Clearance - Front			455		
Ground Clearance - Rear			390		
Overall Vehicle Width (Excl. Mirrors)			2540		
Weights (kg)	1. Axle	2. Axle	3. Axle	4. Axle	Total
Technically Permissible Weights	8000	8000	13400	13400	41900

Weights (kg)	1. Axle	2. Axle	3. Axle	4. Axle	Total
Technically Permissible Weights	8000	8000	13400	13400	41900
Kerb Weight	3610	4228	2100	1960	11897
Payload	4390	3772	11300	11440	30003
GVM (Legal)	8000	8000	9500	9500	32000

STANDARD EQUIPMENT

- Extra Heavy Duty Features (Twin Clutch, 13R 22.5 Tyre, Fuel Tank Guard, Parabolic Tandem Suspension)
- Manuel Air Conditioner
- AM/FM/Aux In/USB/Bluetooth (Radio with Bluetooth)
- Transmission Offset (double gear) PTO without Flange
- 4 Point Independent Cab Suspension for Day Cab
- Drum Brake
- Cruise Control
- Electrically Operated Windows
- Electrically Operated and Heated Side Mirrors
- Electrically Operated Headlamp Leveling
- Rake and Reach Adjustable Steering Column
- Heated and Air Suspended Driver Seat
- Lumbar Support
- Short Bumper
- Front Vehicle Antiroll Bar
- Anti-lock Brake System (ABS)
- Brake Lining Wear Sensor
- Immobilizer
- Single Key with Remote Control and Central Locking
- Home Safe
- Approach Lights
- Differential Lock
- Digital Tachograph
- Switchable Air Compressor (For Improved Fuel Economy)
- Front Towing Hooks (Double Hook)
- Reinforced Wheel Rim

OPTIONAL EQUIPMENT

- Automated Transmission
 (with Normal Mode, Off-Road Mode, Rocking Mode)
- Engine Driven PTO and Interior Control Unit
- Transmission Direct (Double Gear) PTO without Flange (includes Power Take off Control Unit)
- Intarder
- ADR Pack
- Auxiliary Cabin Heater (Wet Type)
- Cold Pack with Wet Type Cab Heater and 225 Ah Battery
- Electrically Operated Cab Tilting
- Oil Pan Protection
- Dual Passenger Seat *
- Manually Operated Sunroof
- Low Roof Sleeper Cab
- Lateral Protection
- Rear Window
- Automatic Traction Control (ATC)
- Less Spare Tire

^{*}Not available with Low Roof Sleeper Cab.